

# RHINOCEROS

## KS1000




### MINI SKID STEER

DIMENSIONS (STD)	U.S.(in)	METRIC
A Operating height, max std. bucket	117in	2980mm
D Overall length of machine, std.bucket	117in	2980mm
E Overall length of loader, no attachment	83.5in	2120mm
C Overall machine height	56in	1420mm
Machine weight (no attachment, fluids full)	3306lb	1780kg
Operating capacity		
35% tipping capacity	1020lb	462kg
Tipping capacity	2914lb	1320kg
B Hinge pin height, max	87in	2220mm
F Wheelbase/track length	46.5in	1180mm
I Ground clearance, min		
Center	5.7in	145mm
J Angle of departure	33°	
P Overall width	36.7in	932mm
Q Total track width	36.2in	920mm
R Track width	7in	180mm

POWER		
Model No.	Kubota D1703	
Fuel	Diesel	
Gross power rating	24.7hp	18.2kW
Emissions compliance	EPA Tier 4	EU Stage V
Number of cylinders	3	
Displacement	100.5in <sup>3</sup>	1.647L
Bore	3.46 in	87mm
Stroke	3.64 in	92.4mm
Rated speed	2,200rpm	

OPERATION		
Ground drive speed		
Forward/Reverse	4mph	6.5km/h
Ground pressure(ISO/CD 16754)		
9-in(230-mm)tracks	4.5psi	0.31bar

HYDRAULIC SYSTEM		
Auxiliary circuit		
Gear pump		
Flow rate (pump #1)	15gpm	56.8L/min
Pressure	3,190psi	220bar
Dual hydrostatic ground drive pumps		
Flow rate	22.1gpm	83.6L/min
Pressure	3,190psi	220bar

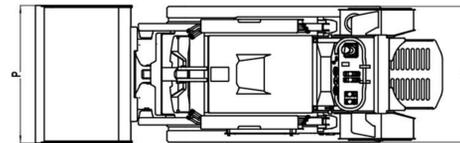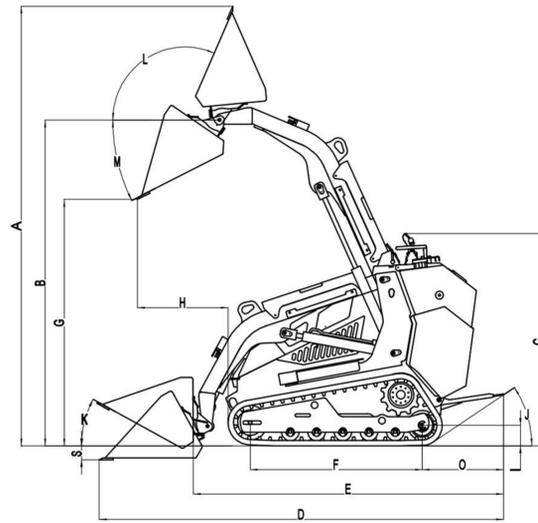

FLUID CAPACITIES	
Fuel tank capacity	10.5gal
Lubricating oil capacity	1.3gal
Hydraulic reservoir capacity	9.5gal

BATTERY	
SAE reserve capacity rating	110min
SAE cold crank @ 0°F (-18°C)	800amps
Electrical system	12V

[www.rhinoexcavator.com](http://www.rhinoexcavator.com)



Valve: TAI FENG  
Main Pump: Italian BONDIOLI Pump  
Auxiliary Pump: Wanye Pump  
Traveling motor: HENGLI



SHANDONG KEN STONE HEAVY MACHINERY CO.,LTD



Factory visit

Address : Dingyuanzhai Industrial Park, Guan County, Liaocheng city, Shandong Province, China  
Postal code : 252512  
Website : [www.rhinoexcavator.com](http://www.rhinoexcavator.com)  
E-mail : [office@sdxiniu.com](mailto:office@sdxiniu.com)

# KS1000

## MINI SKID STEER