


RHINOCEROS



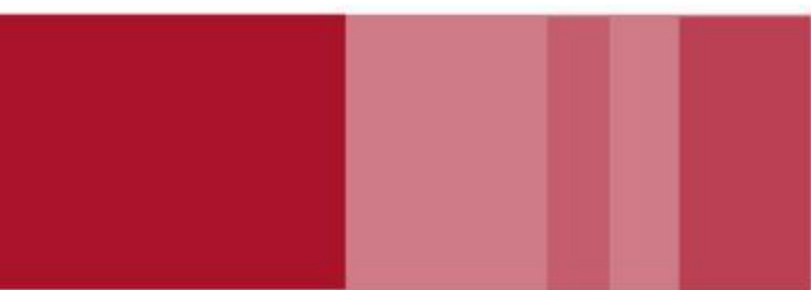


RH290

BACKHOE LOADER

SPECIFICATION		
Operating weight		2965kg
Working device form		Backhoe
Loading bucket capacity		0.3m³
Digging bucket capacity		0.04m³
Engine	Model No.	KUBOTA D1105
	Displacement	1.132L
	Rated power	14.0 KW/2200r/min
	Max. torque	70.3 N.m/1600r/min
	Cooling	Water-cooled
	Emission	EPA Tier 4
	Displacement	1132m³
	Fuel	Diese
Hydraulic and liquid capacity	Pump type	Plunger pump
	Work pressure	210 Bar
	Flow rate	110 L/min
Brake system	Driving brake form	Oil clamp disc
	Parking brake form	Electronic Parking Disc Brake
Fluid Capacity	Fuel	35L
	Hydraulic Oil	35L
	Engine Oil	5.1L


OPERATING RANGE		
A	Overall length(Standard bucket)	4890mm
B	Wheelbase	1800mm
C	Overall height	2570mm
D	Height of seat to ground	1450mm
E	Departure angle	23.3°
F	Approach angle	46.7°
G	Overall width	1550mm
H	Work distance	410mm
I	Max unloading angle	53°
J	Dumping height	1940mm
K	Max. flating height	2337mm
L	Bucket hinge point height	2590mm
M	Overall working height	3034mm
N	Max. horizontal pushing depth	50mm
O	Axis to bucket pin	432mm
P	Max. digging depth	2460mm
Q	Max. vertical digging depth	1752mm
S	Max. digging height	3380mm
T	Max. dumping height	2340mm
U	Max.digging radius at the excavation end	3350mm
V	Min. swing radius at the excavation end	1190mm
W	Stabilizer pad penetration	160mm

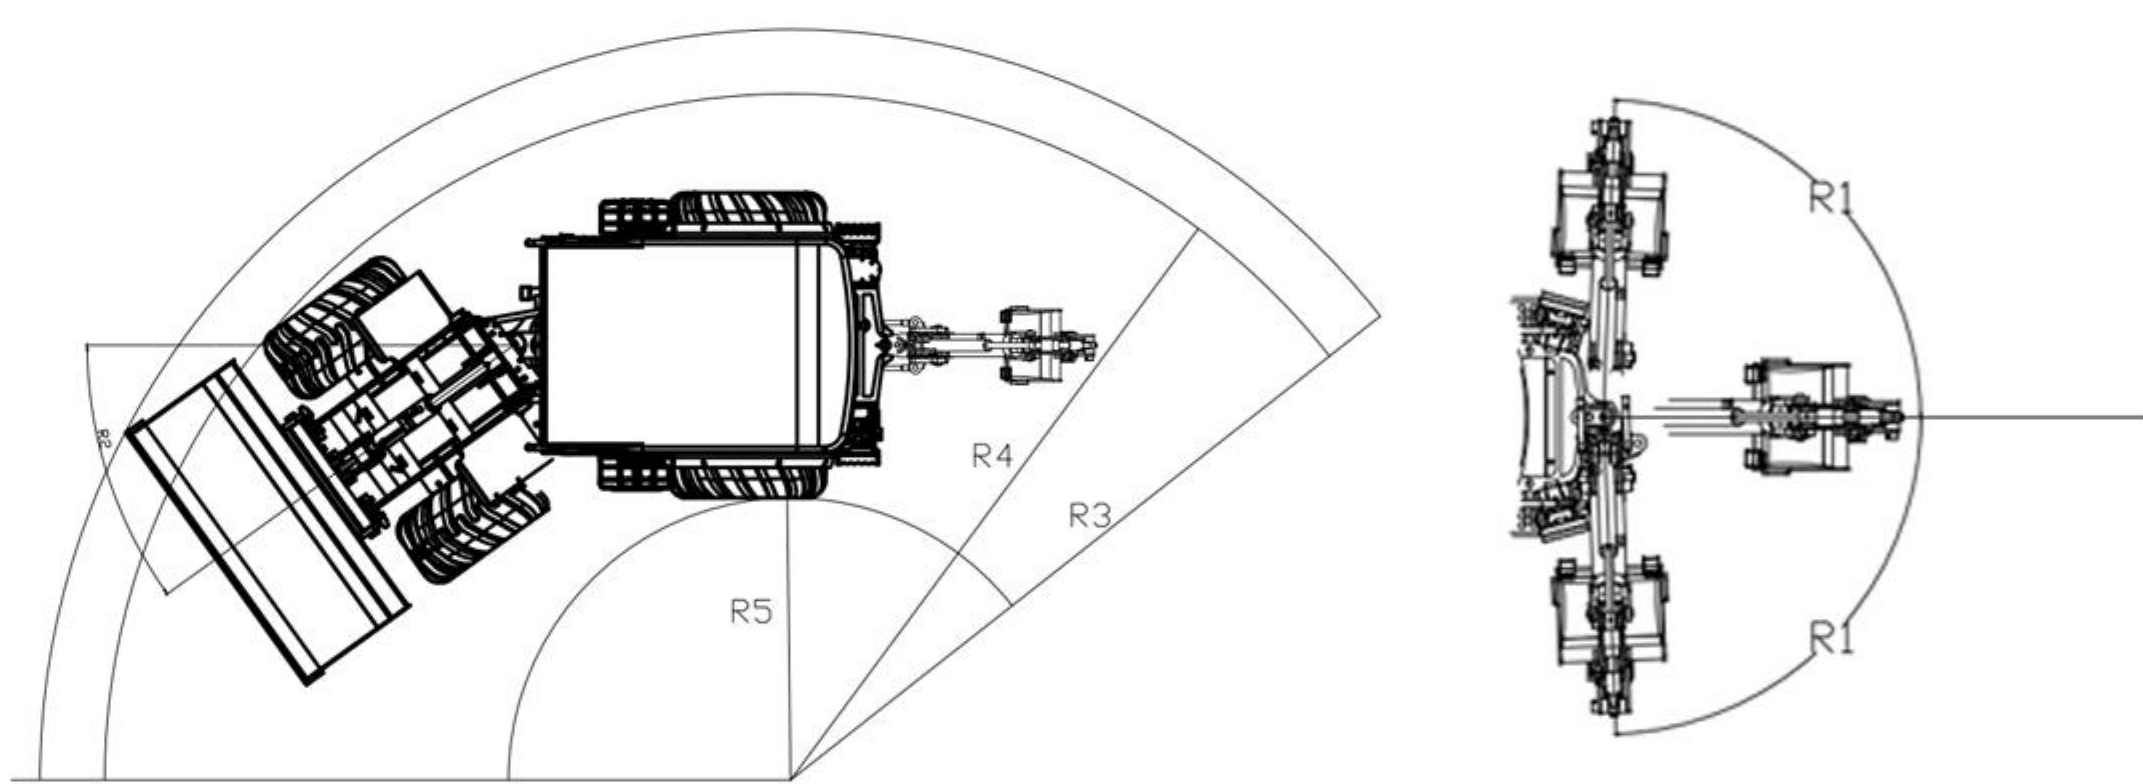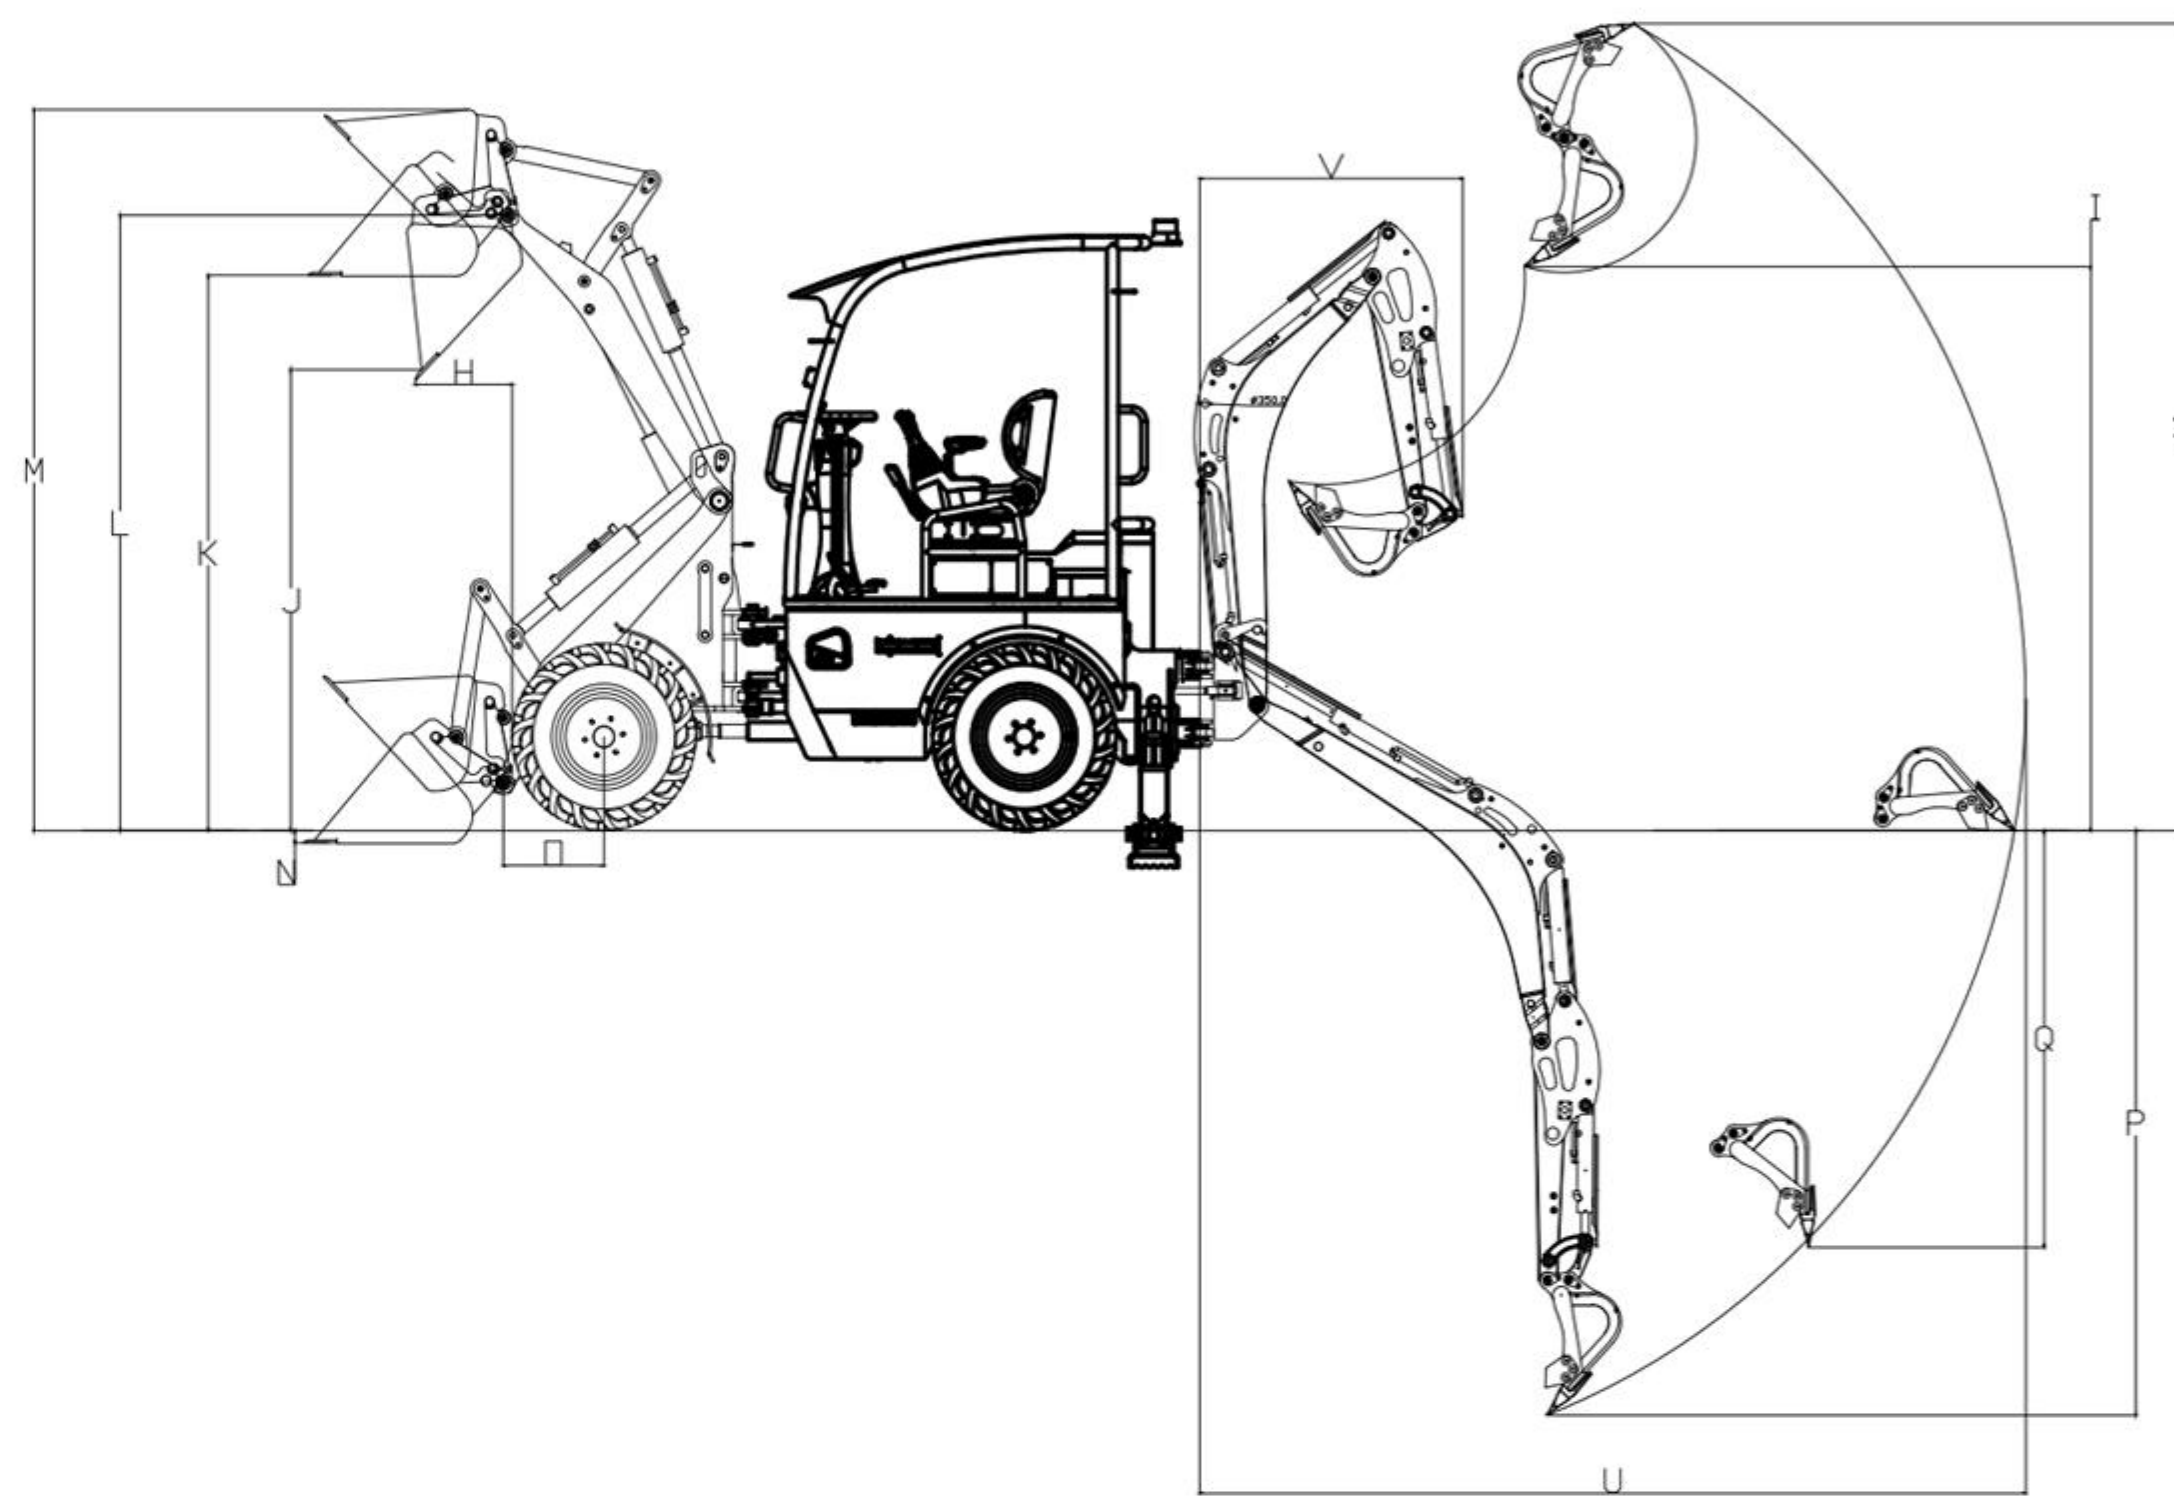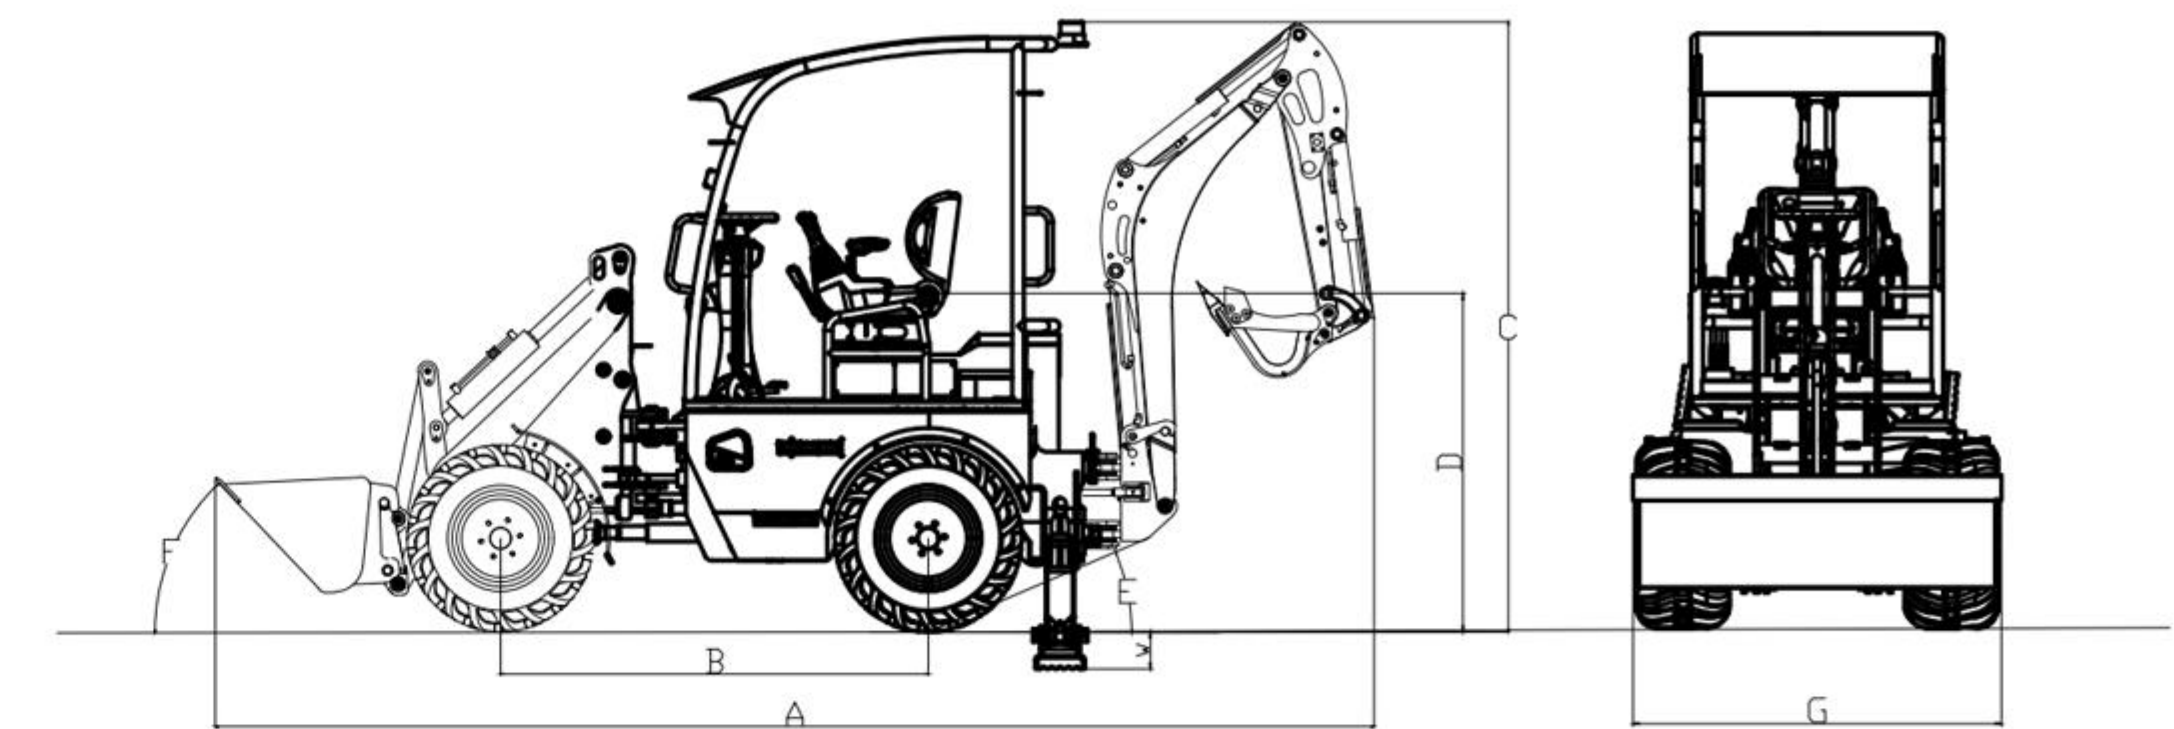

R1	Left and right swing angles of excavation end	85°
R2	Corner	36°
R3	Horizontal passing radius	3740mm
R4	Turning radius	3420mm
R5	Inner turning radius	1400mm



- VALVE:TAIFENG
- PUMP:TAIFENG
- AXLE:HERCULES
- TRAVELING MOTOR:WEIKE
- CYLINDER:WOERXIN

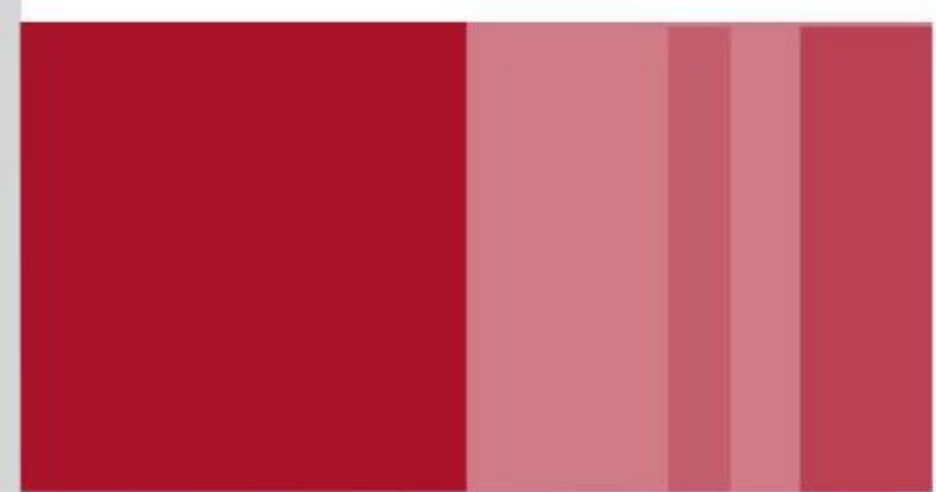

RH290

BACKHOE LOADER