

RHINOCEROS

RH60E

CRAWLER EXCAVATOR

SPECIFICATION


Machine weight	5500kg	
Standard bucket capacity	0.21 cbm	
Engine	Model No.	Yanmar 4TNV98
	Displacement	3.319L
	Rated power	44.4KW/2200rpm
	Max. torque	223.3~243.5N.m/1650rpm
Speed and digging force	Max.travel speed	5.5 km/h
	Swing speed	10 rpm
	Max. gradeability	30°
Hydraulic and liquid capacity	Hydraulic system	Load sensing hydraulic system
	Pressure	25 MPa
	Max.flow rate	163L/min
	Hydraulic oil tank capacity	72 L
	Fuel tank capacity	120L
	Engine oil capacity (effective)	12 L

OPERATING RANGE

Working device	Boom 3.0m + Arm 1.6m	
A1	Max.digging radius	6135mm
B1	Max. digging depth	3800mm
C1	Max. digging height	5795mm
D1	Max. dumping height	4110mm
E1	Min. swing radius	2412mm
	Bucket digging force	44 KN
	Arm digging force	27.5 KN

MAIN DIMENSIONS

A	Total length	Boom 3.0m + Arm 1.6m	5850mm
B	Total high	Boom 3.0m + Arm 1.6m	2590mm
C	Tail turning radius		1650mm
V	Height of cabin above machine		920mm
E	Ground clearance of counterweight		685mm
F	Total width of upper rotating platform		1850mm
G	Cabin height		2868mm
H	Chassis width		1880mm
K	Wheel tread		1540mm
Y	Traveling length		2540mm
a	Track width		400mm
b	Track height		615mm
c	Min.ground clearance		360mm

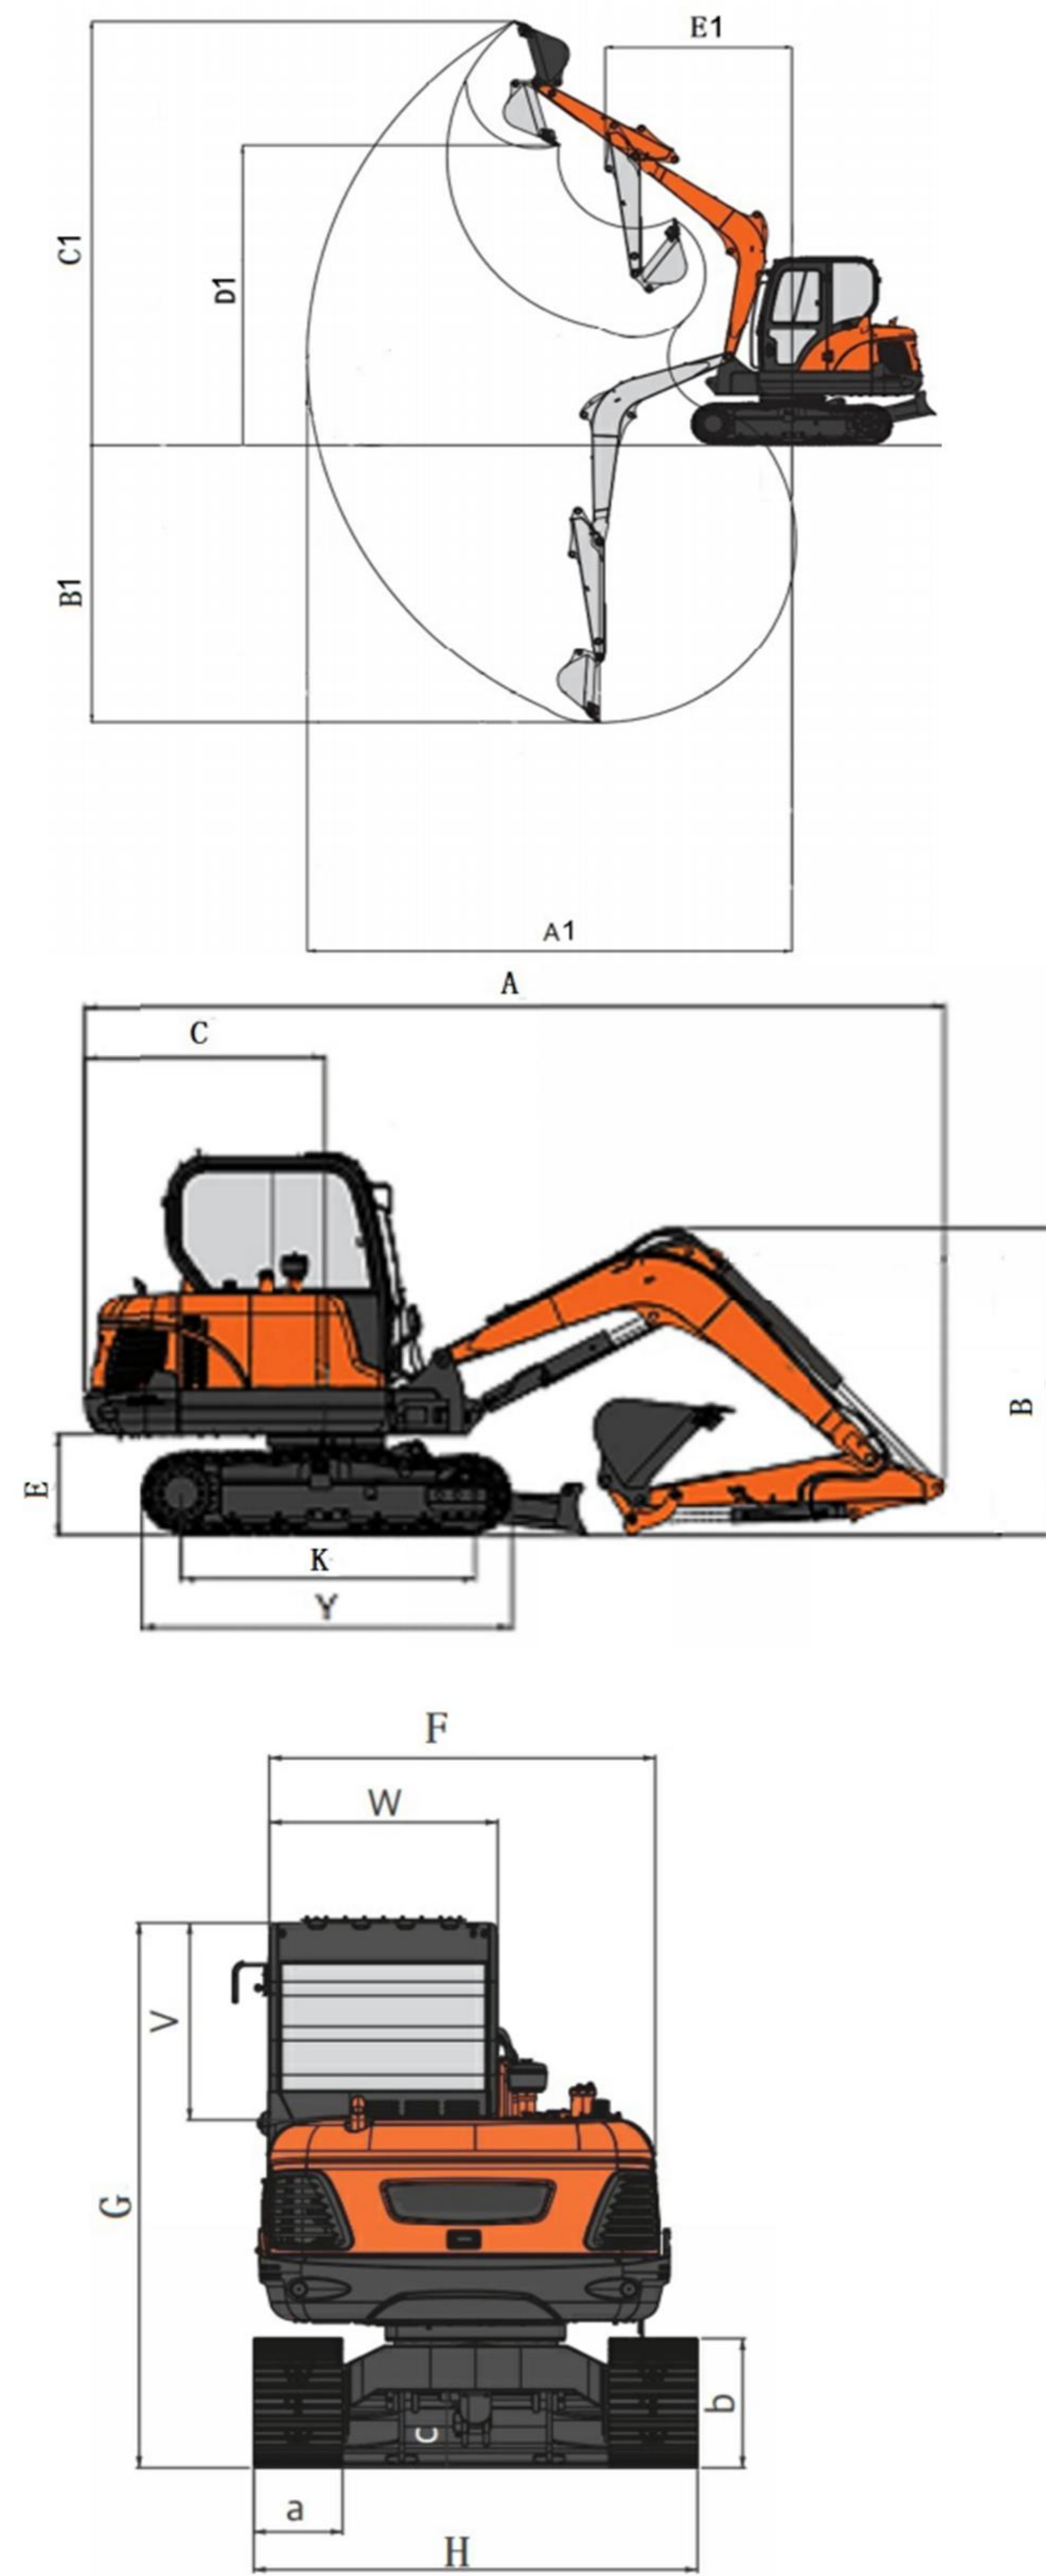

- VALVE:EDDIE
- PUMP:EDDIE
- SWING MOTOR:EATON
- TRAVELING MOTOR:JINGKEN
- CYLINDER:HENGLI



RH60E

CRAWLER EXCAVATOR